

System Specifications



1.91 Kg

Maximal Thrust:



16"

Propeller Diameter



22.2 V

Voltage



216 g

Mass

Motor

Name:	M-3014-380kv
Manufacturer:	Scorpion
KV [RPM/V]:	377
Mass (Inc. Cables) [g]:	121
Max Continuous Current [A]:	15
Max Peak Current (2s) [A]:	20
Voltage [V]:	26
Contact:	support@spihk.com

ESC

Name:	Tribunus 06-80A ESC SBEC
Manufacturer:	Scorpion
Mass (Inc. Cables) [g]:	74
Max continuous Current [A]:	80
Max peak Current (2s) [A]:	120
Voltage [V]:	26.1
Contact:	support@spihk.com

Propeller



Name:	16x6
Manufacturer:	Mejzlik
Diameter ["]:	16
Pitch ["]:	6
Mass [g]:	20
Contact:	info@mejzlik.eu

Measurements

ID 0013

Throttle [%]	Rotational Speed [RPM]	Thrust [kg]	Torque [Nm]	Voltage [V]	Current [A]	Mechanical Power [W]	Electrical Power [W]	System Efficiency [%] ^[1]
20	1437	0.14	0.03	22.2	0.3	4.5	6.9	65.7
29	2025	0.29	0.06	22.2	0.8	12.9	17.8	72.5
38	2564	0.48	0.10	22.2	1.6	26.7	35.3	75.5
47	3060	0.70	0.14	22.2	2.7	45.6	60.3	75.6
56	3521	0.93	0.19	22.2	4.3	69.6	94.1	73.9
64	3941	1.18	0.24	22.1	6.1	98.1	135.4	72.5
73	4331	1.43	0.29	22.1	8.4	130.3	185.0	70.4
82	4693	1.68	0.34	22.0	10.9	165.2	241.1	68.5
91	5026	1.91	0.38	22.0	13.8	201.0	303.3	66.3

Temperature: 26°C, Air Pressure: 1005hPa, Relative Humidity: 28%

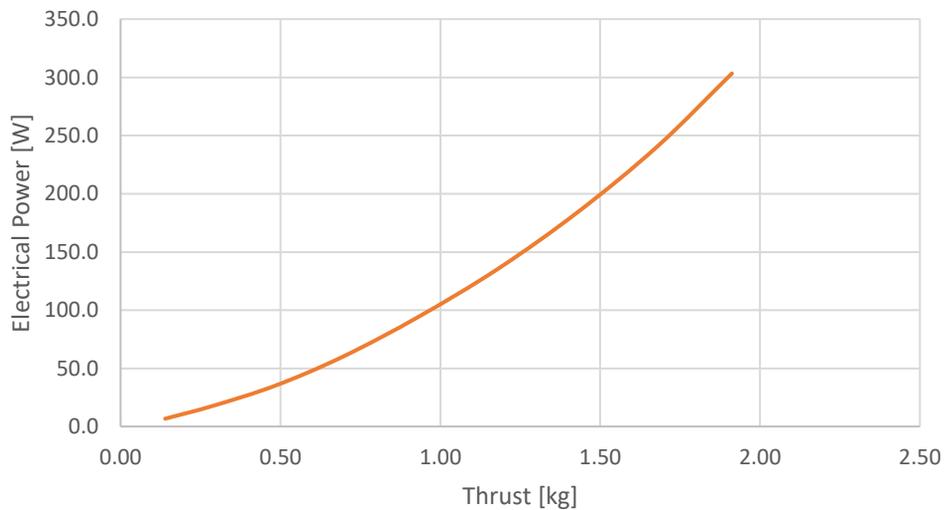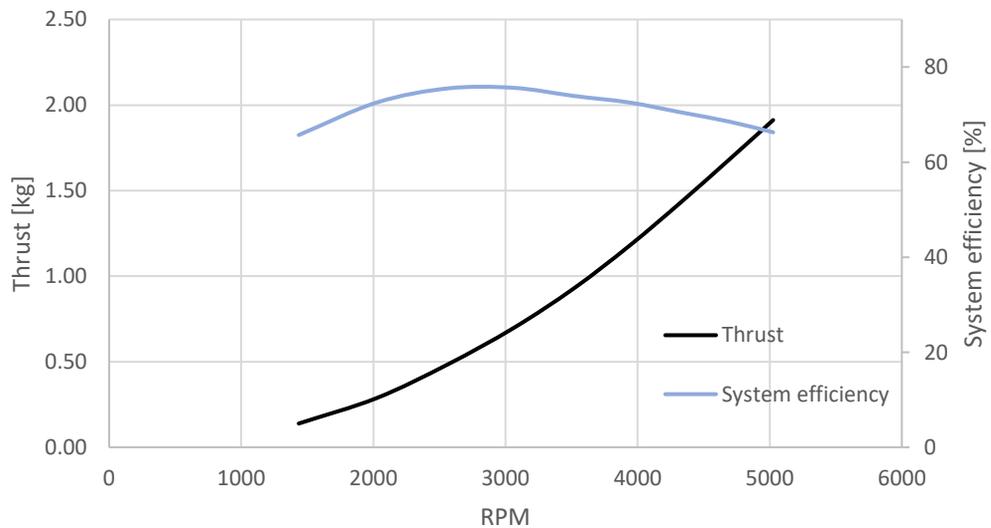

^[1] Includes motor efficiency, controller efficiency, wire and connectors losses.