

System Specifications



2.23 Kg

Maximal Thrust:



16"

Propeller
Diameter



22.2 V

Voltage



312 g

Mass

Motor

Name:	MIII-4015-310kv
Manufacturer:	Scorpion
KV [RPM/V]:	298
Mass (Inc. Cables) [g]:	218
Max Continuous Current [A]:	26
Max Peak Current (2s) [A]:	35
Voltage [V]:	42
Contact:	support@spihk.com

ESC

Name:	Tribunus 06-80A ESC SBEC
Manufacturer:	Scorpion
Mass (Inc. Cables) [g]:	74
Max continuous Current [A]:	80
Max peak Current (2s) [A]:	120
Voltage [V]:	26.1
Contact:	support@spihk.com

Propeller



Name:	16x5.5
Manufacturer:	Mejzlik
Diameter ["]:	16
Pitch ["]:	5.5
Mass [g]:	20
Contact:	info@mejzlik.eu

Measurements

ID 0047

Throttle [%]	Rotational Speed [RPM]	Thrust [kg]	Torque [Nm]	Voltage [V]	Current [A]	Mechanical Power [W]	Electrical Power [W]	System Efficiency [%] ^[1]
20	1283	0.10	0.02	22.3	0.3	2.8	5.7	48.9
29	1823	0.21	0.04	22.3	0.6	8.2	13.0	63.1
38	2320	0.35	0.07	22.3	1.1	17.2	23.9	71.9
47	2831	0.54	0.11	22.2	1.9	31.9	41.9	75.9
56	3326	0.76	0.15	22.2	3.0	52.4	66.1	79.2
64	3807	1.01	0.20	22.2	4.4	78.9	97.4	81.0
73	4269	1.27	0.25	22.2	6.1	111.5	135.5	82.3
82	4717	1.58	0.31	22.1	8.3	151.5	183.5	82.6
91	5146	1.90	0.37	22.1	10.9	198.5	239.9	82.7
100	5563	2.23	0.43	22.0	13.8	251.1	304.3	82.5

Temperature: 25.9°C, Air Pressure: 1011hPa, Relative Humidity: 29%

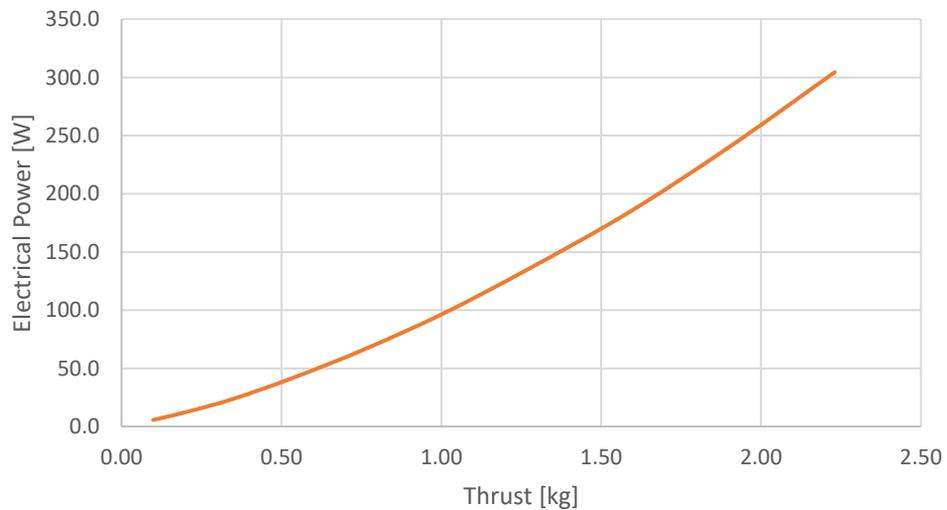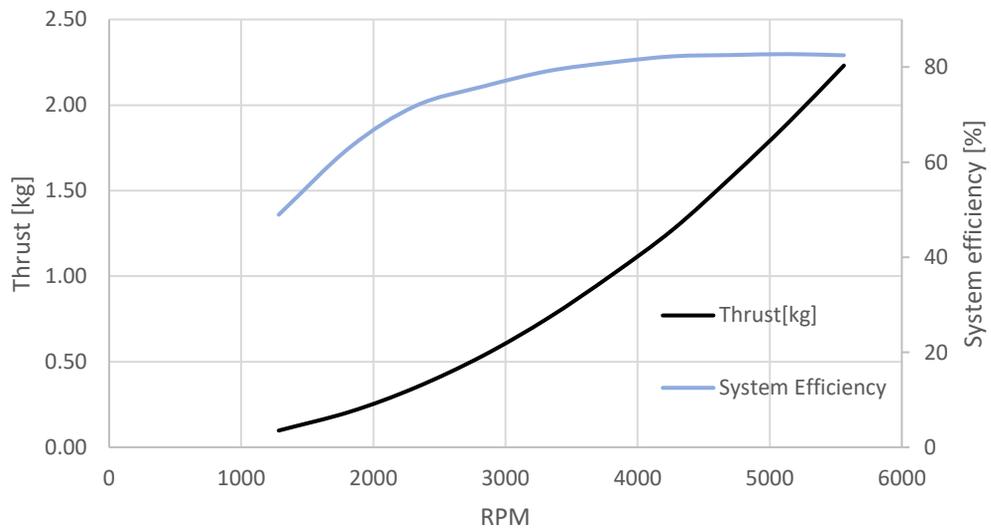

^[1] Includes motor efficiency, controller efficiency, wire and connectors losses.