

Professional Propulsion Systems

SYSTEM SPECIFICATIONS

ENGINE



Name:	4103
Manufacturer:	HIRTH ENGINES
Type:	2-cylinder
Displacement:	100 cm³
Max. performance:	5 kW at 6500 RPM
Weight:	3.4 kg
RPM range:	2500–6500 RPM
Running direction:	Clockwise

PROPELLER



Name:	24x12 3B CCW (Direction guide)
Manufacturer:	Mezlik
Diameter:	24 in
Pitch:	12 in
Mass:	206 g
Contact:	info@mezlik.eu

ANALYSIS



Need expert guidance on analyzing your flight performance?

Our team provides a comprehensive analysis of RPM calculations, motor and propeller efficiency, including customized propeller selection recommendations to ensure your system achieves maximum efficiency.

Please reach out to us at info@mezlik.eu or info@hirthengines.com

ID: **0122**



PERFORMANCE OF THE SYSTEM

Flight velocity

0 m/s

Rotational Speed [RPM]	Thrust [N]	Torque [Nm]	Mechanical Power [W]	Propulsion efficiency [%]
1000	5	0.19	20	0
1800	15	0.61	116	0
2600	34	1.32	359	0
3400	59	2.26	804	0
4200	93	3.52	1548	0
5000	133	5.05	2645	0
5800	181	6.93	4207	0
6600	239	9.29	6418	0
7400	311	12.22	9471	0

Flight velocity

10 m/s

Rotational Speed [RPM]	Thrust [N]	Torque [Nm]	Mechanical Power [W]	Propulsion efficiency [%]
1000	-2	-0.02	-2	—
1800	5	0.42	80	60
2600	22	1.31	356	62
3400	48	2.44	869	55
4200	79	3.81	1676	47
5000	119	5.49	2874	41
5800	167	7.53	4573	36
6600	224	9.96	6883	33
7400	292	12.85	9961	29

PERFORMANCE OF THE SYSTEM

Flight velocity

20 m/s

Rotational Speed [RPM]	Thrust [N]	Torque [Nm]	Mechanical Power [W]	Propulsion efficiency [%]
1000	-4	-0.21	-22	—
1800	-8	-0.06	-12	—
2600	-3	0.27	73	—
3400	18	1.52	540	68
4200	48	3.09	1357	70
5000	86	4.98	2605	66
5800	132	7.19	4366	61
6600	187	9.77	6750	56
7400	251	12.75	9881	51

Flight velocity

30 m/s

Rotational Speed [RPM]	Thrust [N]	Torque [Nm]	Mechanical Power [W]	Propulsion efficiency [%]
1000	-6	-0.62	-64	—
1800	-11	-0.46	-87	—
2600	-18	-0.23	-63	—
3400	-14	0.05	18	—
4200	6	1.27	561	30
5000	39	3.21	1681	69
5800	81	5.54	3366	72
6600	133	8.26	5707	70
7400	195	11.43	8855	66

PERFORMANCE OF THE SYSTEM


Flight velocity

40 m/s

Rotational Speed [RPM]	Thrust [N]	Torque [Nm]	Mechanical Power [W]	Propulsion efficiency [%]
1000	-9	-1.21	-126	—
1800	-14	-1.07	-202	—
2600	-23	-0.82	-223	—
3400	-31	-0.5	-178	—
4200	-30	-0.18	-79	—
5000	-13	0.77	402	—
5800	21	2.87	1744	47
6600	67	5.67	3919	68
7400	125	8.89	6886	73

PERFORMANCE OF THE SYSTEM

Hirth 4103 + Mejzlik 24x12 3B Performance in flight

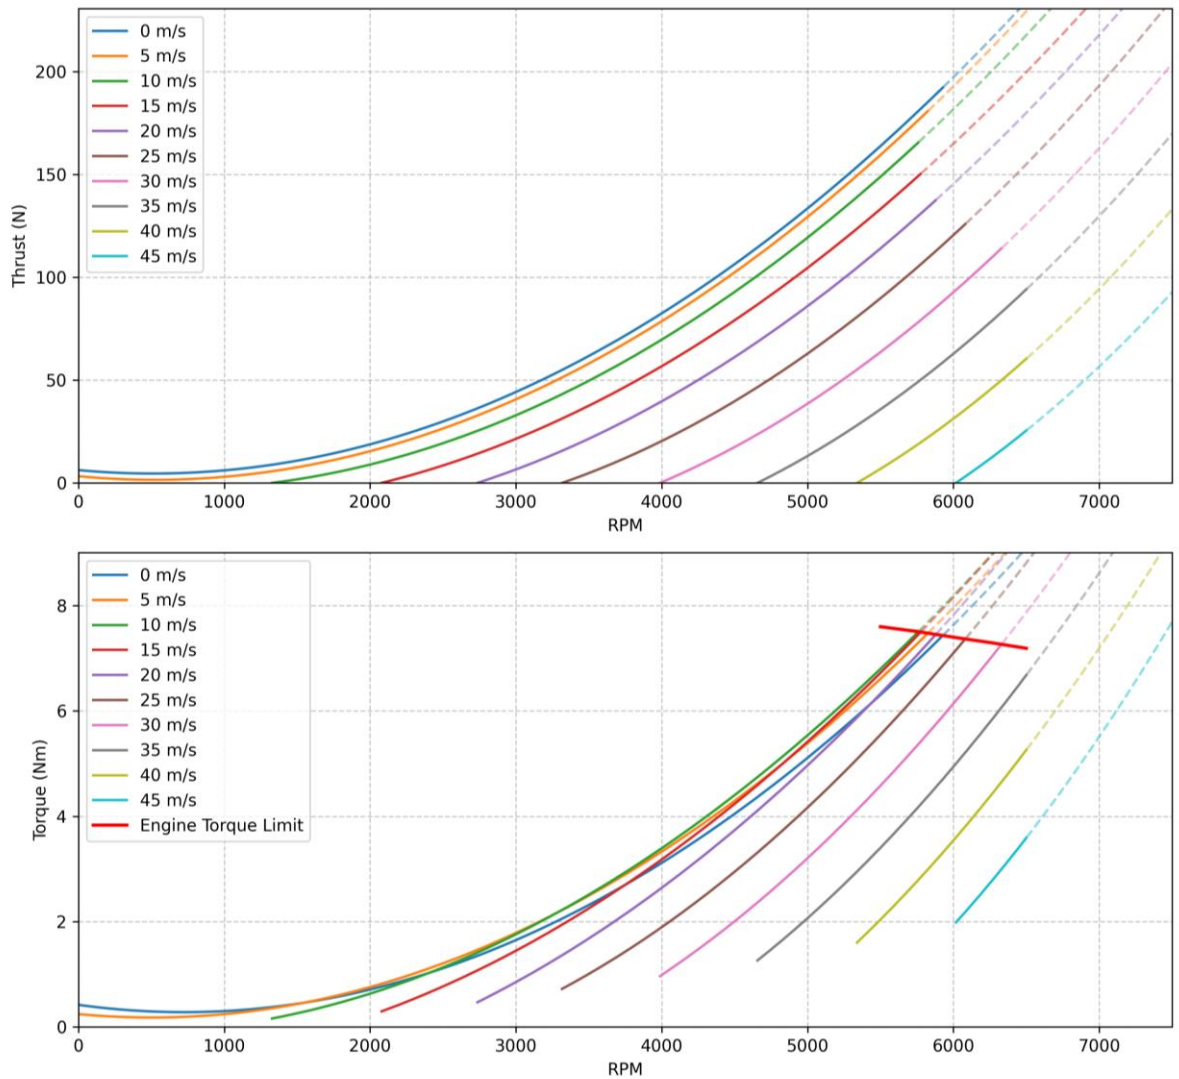

NOTE



Data presented in this product sheet are a combination of measurements of engine performance (RPM, torque), which is complemented with propeller data, simulated in Mejzliks proprietary simulation software. The greyed out values are above engine limit.

Data is valid for 0m ISA. Propeller performance simulation accuracy can diverge at higher tip speeds (above 0.7 Mach). Propeller is structurally safe to operate below Mach 1 tip speed.

ID: **0122**